


Reducing Flexible Coupling

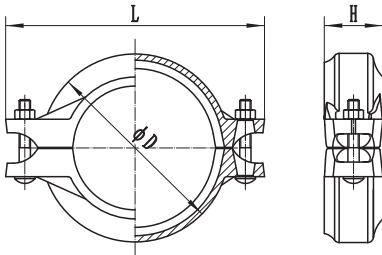

Nominal Size mm/in	Pipe O.D mm/in	Dimensions			Bolt inch/mm	Working pressure Psi
		ΦD mm	L mm	H mm		
50×40	60.3×48.3	82	130	46	3/8×2-1/8 (M10×55)	300
2×1½	2.375×1.9					
65×25	73×33.7					
2½×1	2.875×1.327	97	151	46		
65×32	73×42.4					
2½×1¼	2.875×1.669	97	151	46		
65×40	73×48.3					
2½×1½	2.875×1.9	97	151	46		
65×50	73×60.3					
2½×2	2.875×2.375	107	151	46		
65×50	76.1×60.3					
2½×2	3×2.375	112	166.6	46		
80×40	88.9×48.3					
3×1½	3.5×1.9	123.6	166.6	46		
80×50	88.9×60.3					
3×2	3.5×2.375	123.6	166.6	46		
80×65	88.9×73.0					
3×2½	3.5×2.875	123.6	166.6	46		
80×65	88.9×76.1					
3×2½	3.5×3	151.2	200	50		
100×50	114.3×60.3					
4×2	4.5×2.375	151.2	200	50		
100×65	114.3×73.0					
4×2½	4.5×2.875	151.2	200	50		
100×65	114.3×76.1					
4×2½	4.5×3.0	151.2	200	50		
100×80	114.3×88.9					
4×3	4.5×3.5	167	230	52		
125×100	141.3×114.3					
5×4	5.563×4.5	197	275	52		
150×80	165.1×88.9					
6×3	6.5×3.5	197	275	52		
150×100	165.1×114.3					
6×4	6.5×4.5	199.4	275	52		
150×65	168.3×73					
6×2½	6.525×2.875	199.4	275	52		
150×80	168.3×88.9					
6×3	6.525×3.5	199.4	275	52		
150×100	168.3×114.3					
6×4	6.525×4.5	199.4	275	52		
150×100	168.3×141.3					
6×5	6.625×5.563	258	336	58		
200×150	219.1×168.3					
8×6	8.625×6.525				3/4×4-1/3 (M20×110)	