


Angle-pad Coupling

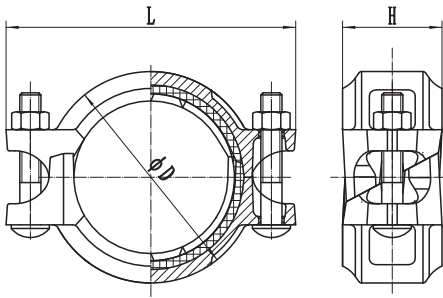

| Nominal Size mm/in | Pipe O.D mm/in | Dimensions | | | Bolt inch/mm | Working pressure Psi |
|--------------------|----------------|------------|---------|---------|-----------------------|-------------------------|
| | | ΦD mm | L mm | H mm | | |
| 25 | 33.7 | 56 | 96 | 47 | 3/8×2-3/8 (M10×60) | 300 |
| 1 | 1.327 | | | | | |
| 32 | 42.4 | | | | | |
| 1 1/4 | 1.669 | | | | | |
| 40 | 48.3 | 69 | 113 | 47 | | |
| 1 1/2 | 1.9 | | | | | |
| 50 | 60.3 | 88 | 122 | 47 | | |
| 2 | 2.375 | | | | | |
| 65 | 73 | 100 | 137 | 47 | | |
| 2 1/2 | 2.875 | | | | | |
| 65 | 76.1 | 100 | 137 | 47 | | |
| 2 1/2 | 3 | | | | | |
| 80 | 88.9 | 116 | 154 | 47 | | |
| 3 | 3.5 | | | | | |
| 100 | 114.3 | 142 | 188 | 52 | | |
| 4 | 4.5 | | | | | |
| 125 | 139.7 | 170 | 219 | 52 | | |
| 5 | 5.5 | | | | | |
| 125 | 141.3 | 170 | 219 | 52 | | |
| 5 | 5.563 | | | | | |
| 150 | 159 | 196 | 244 | 52 | | |
| 6 | 6.25 | | | | | |
| 150 | 165.1 | 197 | 244 | 52 | | |
| 6 | 6.5 | | | | | |
| 150 | 168.3 | 199 | 246 | 52 | | |
| 6 | 6.625 | | | | | |
| 200 | 219.1 | 262 | 322 | 66 | | |
| 8 | 8.625 | | | | | |
| 250 | 273 | 325 | 400 | 66 | | |
| 10 | 10.75 | | | | | |
| 300 | 323.9 | 376 | 468 | 67 | | |
| 12 | 12.75 | | | | | |