


Flexible Coupling

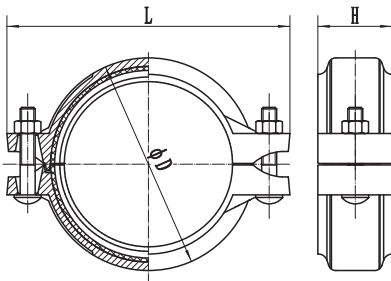

Nominal Size mm/in	Pipe O.D mm/in	Dimensions			Bolt inch/mm	Working pressure Psi	
		ΦD mm	L mm	H mm			
25	33.7	55	97	45	3/8×1-1/2 (M10×40)	300	
1	1.327						
32	42.4	63.5	107.5	45	3/8×1-3/4 (M10×45)		
1 1/4	1.669						
40	48.3	69	114	45	3/8×2-1/8 (M10×55)		
1 1/2	1.9						
50	57	83.6	124	46			
2	2.244						
50	60.3	83.6	124	46			
2	2.375						
65	73	98	137	46			
2 1/2	2.875						
65	76.1	98	139	46			
2 1/2	3						
80	88.9	114	156	46			1/2×2-5/8 (M12×65)
3	3.5						
100	108	138	186	50			
4	4.25						
100	114.3	142	189	50			
4	4.5						
125	133	164	213	50			
5	5.25						
125	139.7	170	222	50			
5	5.5						
125	141.3	170	218	50			
5	5.563						
150	159	192	244	50			
6	6.25						
150	165.1	196	244	50			
6	6.5						
150	168.3	198	251	50			
6	6.625						
200	216.3	254	340	62	3/4×3-1/2 (M20×90)		
8	8.515						
200	219.1	256	316	60	5/8×3-1/8 (M16×80)		
8	8.625						
250	267.4	313	400	64	3/4×3-1/2 (M20×90)		
10	10.527						
250	273.0	319	393	64	3/4×3-1/2 (M20×90)		
10	10.75						
300	318.5	368	464	64	7/8×4-1/3 (M22×110)		
12	12.539						
300	323.9	374	453	65	3/4×4-1/3 (M20×110)		
12	12.75						
350	355.6	410	510	75	7/8×4-1/3 (M22×110)		
14	14						
350	377	428	478.4	75	7/8×3-1/2 (M22×90)		
14	14.843						
400	426	478	528.6	75			
16	16.771						